



## High-Grade Zinc Hits Continue at Far West

### Highlights:

- Assay results received for TH725, TH727, TH730, TH731, TH732 and TH734 at the Thalanga Far West Uppers Extension program, with assay results for TH736 still outstanding. Highlights include:
  - TH725 intersected 7.6m @ 20.6% Zn Eq. (4.0% Cu, 1.3% Pb, 3.4% Zn, 0.8 g/t Au and 96 g/t Ag) from 124.0m down hole, including 2.0m @ 59.9% Zn Eq. (13.3% Cu, 2.6% Pb, 6.2% Zn, 2.7 g/t Au and 245 g/t Ag) from 129.6m down hole; and
  - TH730 intersected 14.2m @ 7.7% Zn Eq. (0.3% Cu, 1.9% Pb, 4.4% Zn, 0.1 g/t Au and 26 g/t Ag) from 93.0m down hole and 0.4m @ 57.9% Zn Eq. (14.0% Cu, 2.4% Pb, 2.6% Zn, 0.6 g/t Au and 264 g/t Ag) from 120.38m down hole, both in a broad intercept of 29.78m @ 6.2% Zn Eq. (0.6% Cu, 1.1% Pb, 2.7% Zn, 0.1 g/t Au and 22 g/t Ag) from 91.0m down hole.
- TH736 intersected 3.1m of stringer sulphide, massive and semi-massive sulphide mineralisation from 164m down hole – assays are pending.
- Mining One Consultants are currently updating the Far West Mineral Resource and have been engaged to generate a maiden Far West Ore Reserve as well as update the current Far West mine design and production schedule.
- Production at the Thalanga Zinc Project remains on track to resume in Q4 2017.

Near-term zinc producer Red River Resources Limited (ASX: RVR) (“Red River” or the “Company”) is pleased to announce further high-grade assay results from its ongoing drilling program at Thalanga Far West, part of the Thalanga Zinc Project in Queensland.

Red River has received assay results for TH725, TH727, TH730, TH731, TH732 and TH734. Significant results include:

- TH725 intersected **7.6m @ 20.6% Zn Eq. (4.0% Cu, 1.3% Pb, 3.4% Zn, 0.8 g/t Au and 96 g/t Ag) from 124.0m down hole, including 2.0m @ 59.9% Zn Eq. (13.3% Cu, 2.6% Pb, 6.2% Zn, 2.7 g/t Au and 245 g/t Ag) from 129.6m down hole;** and
- TH730 intersected **14.2m @ 7.7% Zn Eq. (0.3% Cu, 1.9% Pb, 4.4% Zn, 0.1 g/t Au and 26 g/t Ag) from 93.0m down hole and 0.4m @ 57.9% Zn Eq. (14.0% Cu, 2.4% Pb, 2.6% Zn, 0.6 g/t Au and 264 g/t Ag) from 120.38m down hole, both in a broad intercept of 29.78m @ 6.2% Zn Eq. (0.6% Cu, 1.1% Pb, 2.7% Zn, 0.1 g/t Au and 22 g/t Ag) from 91.0m down hole.**

TH736 has been completed, intersecting 3.1 metres of stringer sulphide, massive and semi-massive sulphide mineralisation from 164m downhole. Core from TH736 has been submitted for assay.

Red River has engaged Mining One Consultants to update the Far West Mineral Resource, generate a maiden Far West Ore Reserve and update the Far West mine design and production schedule.

Far West is expected to be the second deposit mined as part of the Thalanga Zinc Project restart after the West 45 deposit. Production at the Thalanga Zinc Project remains on track to resume in Q4 2017.

## Thalanga Far West Infill Drilling

Red River has received assay results for drill holes TH725, TH727, TH730, TH731 and TH734 (Table 1) from its ongoing Far West infill and resource extension drilling program. TH732 did not intersect mineralisation and was not submitted for assay.

Table 1 Drill hole assay summary, Thalanga Zinc Project (Far West Infill Drilling)

Hole ID	From (m)	To (m)	Intersection (m) <sup>(1)</sup>	Cu (%)	Pb (%)	Zn (%)	Au (g/t)	Ag (g/t)	Zn Eq. (%)
TH725	124.0	131.6	7.6	4.0%	1.3%	3.4%	0.8 g/t	96 g/t	20.6%
<i>inc.</i>	129.6	131.6	2.0	13.3%	2.6%	6.2%	2.7 g/t	245 g/t	59.9%
TH727	327.0	329.0	2.0	0.3%	0.8%	2.6%	0.1 g/t	37 g/t	5.3%
TH730	93.0	107.2	14.2	0.3%	1.9%	4.4%	0.1 g/t	26 g/t	7.7%
<i>and</i>	120.38	120.78	0.4	14.0%	2.4%	2.6%	0.6 g/t	264 g/t	57.9%
TH731	113.0	116.0	3.0	0.7%	0.9%	2.4%	0.1 g/t	35 g/t	6.5%
TH734	133.0	136.6	3.6	0.3%	0.7%	1.3%	0.1 g/t	19 g/t	3.6%

(1) Downhole width

Table 2 Drill hole geological information summary, Thalanga Zinc Project (Far West Infill)


Hole ID	From (m) <sup>(1)</sup>	To (m) <sup>(1)</sup>	Mineralised Intercept Description	Status
TH736	164.0	166.7	Exhalite/Stringer Sulphides	Assays Pending
	166.7	167.1	Semi Massive Sulphides/Massive Sulphides	Assays Pending

(1) Downhole width

Table 3 Drill hole information summary, Thalanga Zinc Project (Far West Infill)

Hole ID	Depth (m)	Dip	Azi (MGA)	East (MGA)	North (MGA)	RL (MGA)	Lease ID	Hole Status
TH725	143	-78	174	371243	7750620	331.24	ML1531	Completed
TH727	365	-55	208.8	370806	7750982	343.3	ML1531	Completed
TH730	134.2	-62	146.62	371243	7750620	331.24	ML1531	Completed
TH731	137.7	-55.6	126.8	371243	7750620	331.24	ML1531	Completed
TH732	107	-48	128.5	371243	7750620	331.24	ML1531	Completed
TH734	178.8	-50	178.3	371122	7750710	332.2	ML1531	Completed
TH736	187.8	-50	239.8	371122	7750710	332.2	ML1531	Completed

Figure 1 Far West Long Section

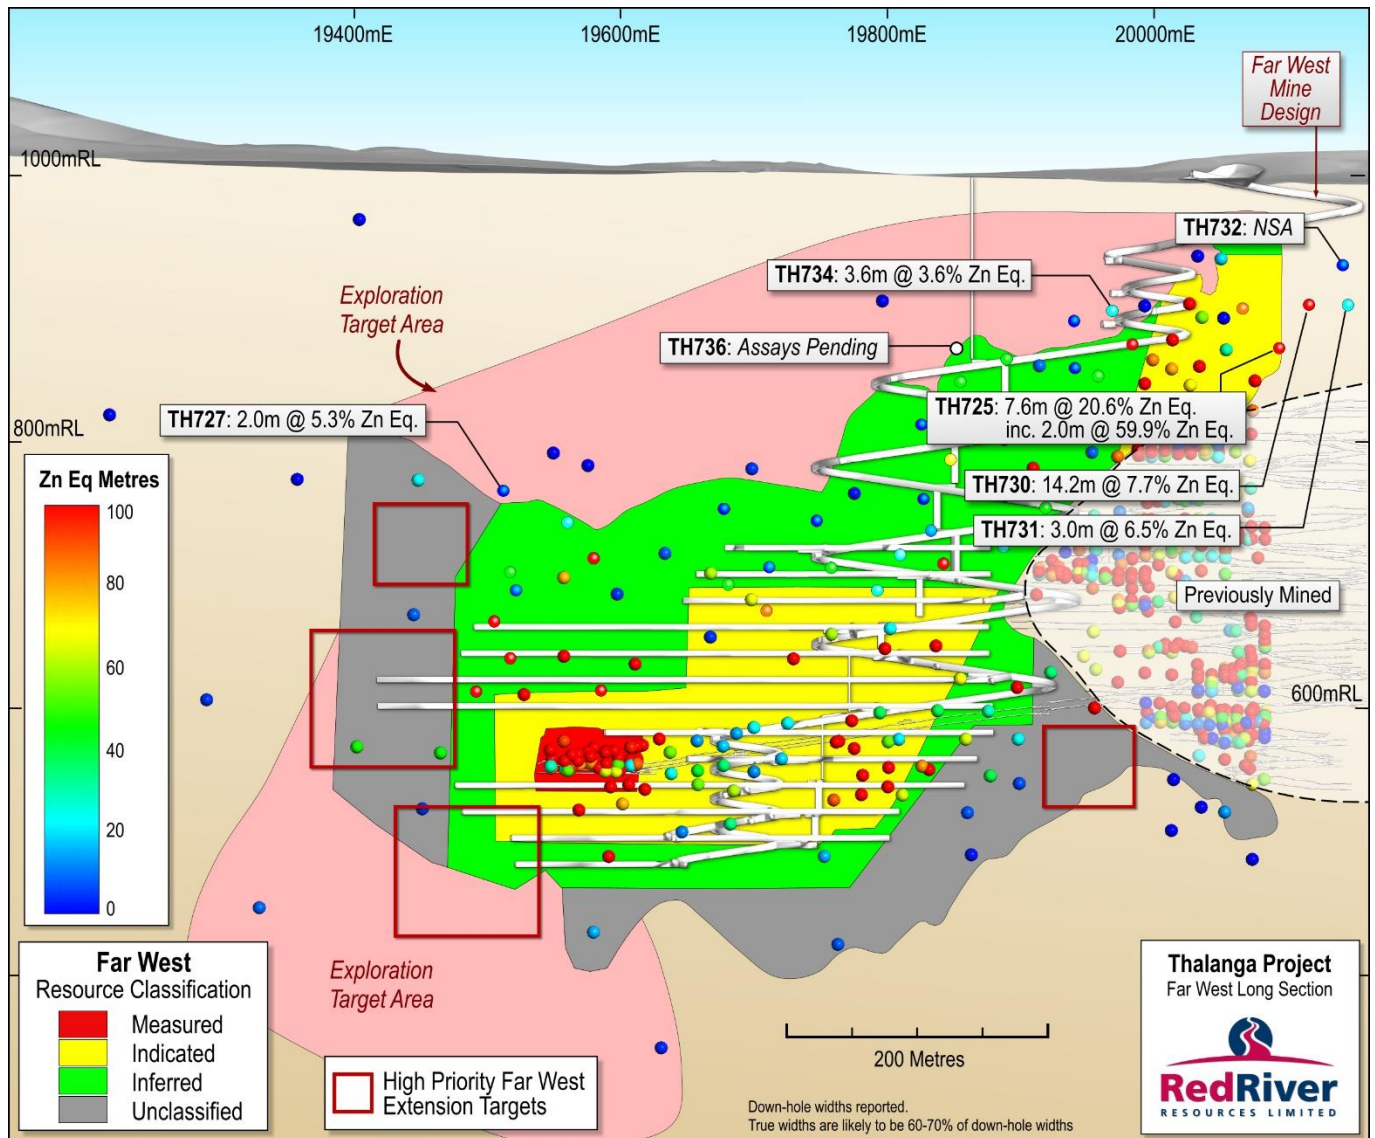

Red River have engaged Mining One to update the Far West Mineral Resource, to generate a maiden Far West Ore Reserve estimate and also to update the current Far West mine plan and production schedule.

## Thalanga Zinc Project Background

Red River released a Restart Study (the internal study prepared by Red River to assess the potential restart of the Thalanga Zinc Project) in November 2015, which demonstrated the highly attractive nature of the Project. The Project has a low operating cost, low pre-production capital cost (\$17.2 million), and a short timeline to production (six months).

Annual average production is 21,400 tonnes of zinc, 3,600 tonnes of copper, 5,000 tonnes of lead, 2,000 ounces of gold and 370,000 ounces of silver in concentrate over an initial mine life of five years, and there is outstanding extension potential.

Please refer to ASX release dated 12 November 2015 for further details on the Thalanga Zinc Project Restart Study. Red River confirms that all material assumptions underpinning the production target in the ASX release dated 12 November 2015 continue to apply and have not materially changed.

The Thalanga Zinc Project Restart Study is based on production from three deposits – West 45, Far West and Waterloo. The Thalanga Zinc Project Restart Study is based on low level technical and economic assessments and there is insufficient data to support the estimation of Ore Reserves at Far West and Waterloo, provide assurance of an economic development case at this stage, or provide certainty that the results from the Thalanga Zinc Project Restart Study will be realised. Further, as the production target that forms the basis of the Thalanga Zinc Project Restart Study includes Mineral Resources that are in the Inferred Category and there is a low level of geological confidence associated with Inferred Mineral Resources, there is no certainty that further exploration work will result in the determination of Indicated Mineral Resources or that the production target itself will be realised.

On behalf of the Board,

**Mel Palancian**  
**Managing Director**  
Red River Resources Limited

---

For further information, please visit Red River's website or contact:

Mel Palancian  
Managing Director  
[mpalancian@redriverresources.com.au](mailto:mpalancian@redriverresources.com.au)  
D: +61 3 9095 7775

Nathan Ryan  
NWR Communications  
[nathan.ryan@nwrcommunications.com.au](mailto:nathan.ryan@nwrcommunications.com.au)  
M: +61 420 582 887

## COMPETENT PERSON STATEMENT

### Exploration Results

The information in this report that relates to Exploration Results is based on information compiled by Mr Alex Nichol who is a member of the Australasian Institute of Geoscientists, and a full time employee of Red River Resources Ltd., and who has sufficient experience relevant to the style of mineralisation and type of deposit under consideration and to the activities being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting Exploration Results, Mineral Resources and Ore Reserves' (JORC Code). Mr Nichol consents to the inclusion in this report of the matters based on the information in the form and context in which it appears.

### Zinc Equivalent Calculation

The net smelter return zinc equivalent (Zn Eq.) calculation adjusts individual grades for all metals included in the metal equivalent calculation applying the following modifying factors: metallurgical recoveries, payability factors (concentrate treatment charges, refining charges, metal payment terms, net smelter return royalties and logistic costs) and metal prices in generating a zinc equivalent value for copper (Cu), lead (Pb), zinc (Zn), gold (Au) and silver (Ag).

Red River has selected to report on a zinc equivalent basis, as zinc is the metal that contributes the most to the net smelter return zinc equivalent (Zn Eq.) calculation. It is the view of Red River Resources that all the metals used in the Zn Eq. formula are expected to be recovered and sold.

Where:

**Metallurgical Recoveries** are derived from historical metallurgical recoveries from test work carried out the Thalanga deposit. The Far West deposit is related to and of a similar style of mineralisation to the Thalanga Operations and it is appropriate to apply similar recoveries. The Metallurgical Recovery for each metal is shown below in Table 1.

**Metal Prices and Foreign Exchange** assumptions are set as per internal Red River price forecasts and are shown below in Table 1.

Table 1 Metallurgical Recoveries and Metal Prices

Metal	Metallurgical Recoveries	Price
Copper	80%	US\$3.00/lb
Lead	70%	US\$0.90/lb
Zinc	88%	US\$1.00/lb
Gold	15%	US\$1,200/oz
Silver	65%	US\$17.00/oz
FX Rate: A\$0.85:US\$1		

**Payable Metal Factors** are calculated for each metal and make allowance for concentrate treatment charges, transport losses, refining charges, metal payment terms and logistic costs. It is the view of Red River that three separate saleable base metal concentrates will be produced at Thalanga. Payable metal factors are detailed below in Table 2.

Table 2 Payable Metal Factors

Metal	Payable Metal Factor
Copper	Copper concentrate treatment charges, copper metal refining charges copper metal payment terms (in copper concentrate), logistic costs and net smelter return royalties
Lead	Lead concentrate treatment charges, lead metal payment terms (in lead concentrate), logistic costs and net smelter return royalties
Zinc	Zinc concentrate treatment charges, zinc metal payment terms (in zinc concentrate), logistic costs and net smelter return royalties
Gold	Gold metal payment terms (in copper and lead concentrates), gold refining charges and net smelter return royalties
Silver	Silver metal payment terms (in copper, lead and zinc concentrates), silver refining charges and net smelter return royalties

The zinc equivalent grade is calculated as per the following formula:

$$\text{Zn Eq.} = (\text{Zn}\% \times 1.0) + (\text{Cu}\% \times 3.3) + (\text{Pb}\% \times 0.9) + (\text{Au ppm} \times 0.5) + (\text{Ag ppm} \times 0.025)$$

The following metal equivalent factors used in the zinc equivalent grade calculation has been derived from metal price x Metallurgical Recovery x Payable Metal Factor, and have then been adjusted relative to zinc (where zinc metal equivalent factor = 1).

Table 3 Metal Equivalent Factors

Metal	Copper	Lead	Zinc	Gold	Silver
Metal Equivalent Factor	3.3	0.9	1.0	0.5	0.025

## APPENDIX 1

### ASSAY DETAILS

Hole ID	From (m)	To (m)	Int (m)	Cu%	Pb%	Zn%	Au g/t	Ag g/t	Zn Eq. %
TH725	121.6	123.0	1.4	0.0	0.2	0.3	0.01	0.5	0.6
TH725	123.0	124.0	1.0	0.0	0.3	0.4	0.01	7.8	1.0
TH725	124.0	125.0	1.0	0.2	1.7	3.0	0.11	12.6	5.7
TH725	125.0	126.0	1.0	0.3	0.8	3.0	0.06	10.4	4.8
TH725	126.0	127.0	1.0	0.3	0.3	3.3	0.08	20.3	5.2
TH725	127.0	128.0	1.0	1.5	1.7	3.6	0.32	164.3	14.4
TH725	128.0	129.0	1.0	1.3	0.1	0.7	0.10	22.7	5.5
TH725	129.0	129.6	0.6	0.5	0.1	0.2	0.26	13.2	2.5
TH725	129.6	130.0	0.4	17.9	3.4	8.5	7.19	290.8	81.6
TH725	130.0	131.3	1.3	14.5	2.9	6.8	1.72	276.6	64.8
TH725	131.3	131.6	0.3	2.0	0.3	0.7	1.24	50.1	9.3
TH725	131.6	133.0	1.4	0.8	0.0	0.2	0.10	6.3	3.1
TH725	133.0	134.0	1.0	0.1	0.0	0.0	0.02	1.4	0.4
TH727	326.0	327.0	1.0	0.01	0.01	0.03	0.01	0.0	0.09
TH727	327.0	327.7	0.7	0.38	0.01	0.09	0.02	9.6	1.59
TH727	327.7	328.0	0.3	1.02	4.65	10.88	0.38	178.8	23.10
TH727	328.0	328.5	0.5	0.07	0.39	2.19	0.04	14.6	3.15
TH727	328.5	329.0	0.5	0.06	0.06	1.51	0.05	13.4	2.11
TH730	91.0	92.0	1.0	0.09	0.96	2.75	0.03	6.2	4.07
TH730	92.0	93.0	1.0	0.05	1.11	1.49	0.04	5.9	2.84
TH730	93.0	94.0	1.0	0.31	3.20	5.52	0.06	16.9	9.89
TH730	94.0	94.9	0.9	0.28	1.66	3.08	0.04	11.1	5.80
TH730	94.9	96.1	1.2	0.57	5.38	8.17	0.06	29.2	15.66
TH730	96.1	97.0	0.9	0.04	0.35	0.38	0.02	3.3	0.90
TH730	97.0	98.0	1.0	0.42	3.43	7.34	0.11	22.8	12.45
TH730	98.0	99.0	1.0	0.12	1.34	1.79	0.04	12.9	3.74
TH730	99.0	100.0	1.0	0.04	0.25	0.23	0.04	8.2	0.81
TH730	100.0	101.0	1.0	0.02	0.18	0.35	0.03	7.6	0.79
TH730	101.0	102.5	1.5	0.09	0.37	0.95	0.06	21.4	2.14
TH730	102.5	104.2	1.7	0.35	2.32	5.44	0.29	52.8	10.16
TH730	104.2	105.7	1.5	0.72	2.05	6.39	0.14	43.1	11.76
TH730	105.7	107.2	1.5	0.20	1.60	9.26	0.08	45.0	12.53
TH730	107.2	108.8	1.6	0.14	0.25	0.99	0.01	9.5	1.92
TH730	108.8	110.3	1.5	1.49	0.31	1.04	0.14	25.2	6.94
TH730	110.3	111.2	0.9	0.82	0.12	0.30	0.06	13.0	3.48
TH730	111.2	112.7	1.5	1.32	0.23	0.97	0.11	19.0	6.06
TH730	112.7	114.2	1.5	1.13	0.02	0.26	0.10	5.7	4.21
TH730	114.2	115.7	1.5	0.07	0.02	0.11	0.01	1.5	0.38
TH730	115.7	117.2	1.5	0.01	0.01	0.30	0.01	0.6	0.35
TH730	117.2	118.7	1.5	0.27	0.70	4.10	0.04	18.0	6.09
TH730	118.7	119.9	1.2	0.23	0.22	0.61	0.04	31.6	2.39
TH730	119.9	120.4	0.5	0.75	0.07	0.17	0.06	12.1	3.05
TH730	120.4	120.8	0.4	13.99	2.43	2.61	0.61	263.9	57.86
TH730	120.8	121.6	0.8	0.04	0.02	0.07	0.01	2.9	0.30
TH730	121.6	123.1	1.5	0.03	0.01	0.02	0.01	1.0	0.17
TH730	123.1	123.8	0.7	0.00	0.00	0.02	0.01	0.3	0.03

TH731	113.0	114.0	1.0	0.40	1.73	2.06	0.14	49	6.22
TH731	114.0	115.0	1.0	0.19	0.54	1.77	0.05	25	3.54
TH731	115.0	116.0	1.0	1.61	0.28	3.25	0.15	30	9.65
TH734	131.0	132.0	1.0	0.06	0.03	0.04	0.03	3.6	0.38
TH734	132.0	133.0	1.0	0.22	0.12	0.19	0.02	3.5	1.13
TH734	133.0	134.0	1.0	0.31	0.46	0.78	0.04	9.6	2.49
TH734	134.0	135.0	1.0	0.20	0.62	1.66	0.14	30.4	3.71
TH734	135.0	135.8	0.8	0.50	1.20	1.78	0.05	22.1	5.07
TH734	135.8	136.6	0.8	0.36	0.53	1.24	0.06	15.2	3.30
*bdl – below detection limit									



## JORC Code, 2012 Edition – Table 1

### Section 1 Sampling Techniques and Data

Criteria	JORC Code explanation	Commentary
<b>Sampling techniques</b>	<ul style="list-style-type: none"> <li>Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.</li> <li>Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.</li> <li>Aspects of the determination of mineralisation that are Material to the Public Report.</li> <li>In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.</li> </ul>	<ul style="list-style-type: none"> <li>Diamond drilling was used to obtain core samples</li> <li>Samples consist of half NQ2 drill core</li> <li>Sample intervals were selected by company geologists based on visual mineralisation</li> <li>Intervals ranged from 0.5 to 1.45m based on geological boundaries</li> <li>Samples were sawn if half using an onsite core saw and sent to Intertek Genalysis laboratories Townsville.</li> <li>Samples were crushed to sub 6mm, split and pulverised to sub 75µm in order to produce a representative sub-sample for analysis.</li> <li>Analysis consisted of a four acid digest and Inductively Coupled Plasma Optical Emission Spectrometry (ICP-OES) for the following elements; Ag, As, Ba, Bi, Ca, Cu, Fe, K, Mg, Mn, Na, Pb, S, Sb, Ti, Zn, &amp; Zr. A selection of samples was also assayed for Au using a 30g Fire Assay technique</li> </ul>
<b>Drilling techniques</b>	<ul style="list-style-type: none"> <li>Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).</li> </ul>	<ul style="list-style-type: none"> <li>Drilling techniques consist of;</li> <li>PCD drilling through the cover sequence</li> <li>HQ diamond core drilling for the first 30-50m of each hole</li> <li>NQ2 diamond core drilling for the remainder of the drill holes.</li> </ul>
<b>Drill sample recovery</b>	<ul style="list-style-type: none"> <li>Method of recording and assessing core and chip sample recoveries and results assessed.</li> <li>Measures taken to maximise sample recovery and ensure representative nature of the samples.</li> <li>Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.</li> </ul>	<ul style="list-style-type: none"> <li>Core is measured every meter with recovery and RQD taken over the meter interval</li> <li>Sample recovery is measured and recorded by company trained geology technicians and geologists</li> <li>Any issues with recovery is always checked against drillers run sheet.</li> <li>Good ground conditions have been encountered to date</li> </ul>
<b>Logging</b>	<ul style="list-style-type: none"> <li>Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining</li> </ul>	<ul style="list-style-type: none"> <li>Holes are logged to a level of detail that will support mineral resource estimation.</li> <li>Qualitative logging includes lithology, alteration, structures and textures</li> </ul>

Criteria	JORC Code explanation	Commentary
	<p><i>studies and metallurgical studies.</i></p> <ul style="list-style-type: none"> <li>• <i>Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.</i></li> <li>• <i>The total length and percentage of the relevant intersections logged.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Quantitative logging includes sulphide and gangue mineral percentages</li> <li>• All drill core was photographed</li> <li>• All drill holes have been logged in full</li> </ul>
<p><b>Sub-sampling techniques and sample preparation</b></p>	<ul style="list-style-type: none"> <li>• <i>If core, whether cut or sawn and whether quarter, half or all core taken.</i></li> <li>• <i>If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.</i></li> <li>• <i>For all sample types, the nature, quality and appropriateness of the sample preparation technique.</i></li> <li>• <i>Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.</i></li> <li>• <i>Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling.</i></li> <li>• <i>Whether sample sizes are appropriate to the grain size of the material being sampled.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Core was sawn and half core sent for analysis</li> <li>• Sample preparation is industry standard, occurring at an independent commercial laboratory</li> <li>• Samples were crushed to sub 6mm, split and pulverised to sub 75µm in order to produce a representative sub-sample for analysis</li> <li>• Laboratory certified standards were used in each sample batch</li> <li>• The sample sizes are considered to be appropriate to correctly represent the mineralisation style</li> </ul>
<p><b>Quality of assay data and laboratory tests</b></p>	<ul style="list-style-type: none"> <li>• <i>The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.</i></li> <li>• <i>For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.</i></li> <li>• <i>Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.</i></li> </ul>	<ul style="list-style-type: none"> <li>• The assay methods employed are considered appropriate for near total digestion</li> <li>• Laboratory certified standards were used in each sample batch</li> <li>• Certified standards returned results within an acceptable range</li> </ul>
<p><b>Verification of sampling and assaying</b></p>	<ul style="list-style-type: none"> <li>• <i>The verification of significant intersections by either independent or alternative company personnel.</i></li> <li>• <i>The use of twinned holes.</i></li> <li>• <i>Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.</i></li> <li>• <i>Discuss any adjustment to assay data.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Laboratory results are reviewed by Company geologists and laboratory technicians</li> </ul>
<p><b>Location of data points</b></p>	<ul style="list-style-type: none"> <li>• <i>Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Collars surveyed with handheld GPS</li> <li>• Down hole surveys conducted with magnetic multi-shot digital camera</li> <li>• Coordinate system used is MGA94 Zone 55</li> <li>• Topographic control is based on a detailed 3D Digital</li> </ul>

Criteria	JORC Code explanation	Commentary
	<ul style="list-style-type: none"> <li>• <i>Specification of the grid system used.</i></li> <li>• <i>Quality and adequacy of topographic control.</i></li> </ul>	Elevation Model
<b>Data spacing and distribution</b>	<ul style="list-style-type: none"> <li>• <i>Data spacing for reporting of Exploration Results.</i></li> <li>• <i>Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.</i></li> <li>• <i>Whether sample compositing has been applied.</i></li> </ul>	<ul style="list-style-type: none"> <li>• The drilling has been designed on approximately 40m x 40m spacing</li> <li>• This data spacing and distribution is sufficient to establish a degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedures applied.</li> <li>• No sample compositing has been applied</li> </ul>
<b>Orientation of data in relation to geological structure</b>	<ul style="list-style-type: none"> <li>• <i>Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.</i></li> <li>• <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Drill holes are orientated perpendicular to the perceived strike of the host lithologies</li> <li>• Drill holes are drilled at a dip based on logistics and dip of anomaly to be tested</li> <li>• The orientation of the drilling is designed to not bias sampling</li> <li>• The orientation of the drill core is determined using a Digital Orientation Tool</li> </ul>
<b>Sample security</b>	<ul style="list-style-type: none"> <li>• <i>The measures taken to ensure sample security.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Samples have been overseen by company geologists during transport from site to Intertek Genalysis laboratories, Townsville.</li> </ul>
<b>Audits or reviews</b>	<ul style="list-style-type: none"> <li>• <i>The results of any audits or reviews of sampling techniques and data.</i></li> </ul>	<ul style="list-style-type: none"> <li>• No audits or reviews have been carried out at this point</li> </ul>

## Section 2 Reporting of Exploration Results

Criteria	JORC Code explanation	Commentary
<b>Mineral tenement and land tenure status</b>	<ul style="list-style-type: none"> <li>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</li> <li>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</li> </ul>	<ul style="list-style-type: none"> <li>The drilling was conducted on Mining Lease ML1531</li> <li>ML1531 is held by Cromarty Pty Ltd. (a wholly owned subsidiary of Red River Resources) and form part of Red River's Thalanga Zinc Project</li> <li>No Native Title exists over ML1531</li> <li>The Mining Leases are in good standing</li> </ul>
<b>Exploration done by other parties</b>	<ul style="list-style-type: none"> <li>Acknowledgment and appraisal of exploration by other parties.</li> </ul>	<ul style="list-style-type: none"> <li>Historic Exploration was carried out by PanContinental Mining &amp; RGC Exploration. This included drilling and geophysics</li> </ul>
<b>Geology</b>	<ul style="list-style-type: none"> <li>Deposit type, geological setting and style of mineralisation.</li> </ul>	<ul style="list-style-type: none"> <li>The exploration model is Volcanic Hosted Massive Sulphide (VHMS) base metal mineralisation</li> <li>The regional geological setting is the Mt Windsor Volcanic Sub-province, consisting of Cambro-Ordovician marine volcanic and volcano-sedimentary sequences</li> </ul>
<b>Drill hole Information</b>	<ul style="list-style-type: none"> <li>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes, including, easting and northing, elevation or RL, dip and azimuth, down hole length, interception depth and hole length.</li> <li>If the exclusion of this information is justified the Competent Person should clearly explain why this is the case.</li> </ul>	<ul style="list-style-type: none"> <li>See Table 3 – Drill Hole Details</li> <li>See Appendix 1 – Assay Details</li> </ul>
<b>Data aggregation methods</b>	<ul style="list-style-type: none"> <li>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</li> <li>Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail.</li> <li>The assumptions used for any reporting of metal equivalent values should be clearly stated.</li> </ul>	<ul style="list-style-type: none"> <li>Interval length weighted assay results are reported Significant Intercepts are chosen based on the context of the results, for example significant intercepts relating to resource definition are generally &gt; 5% Zn Equivalents.</li> <li>Refer to Appendix 1 for metal equivalent calculation methodology</li> </ul>

Criteria	JORC Code explanation	Commentary
<b>Relationship between mineralisation widths and intercept lengths</b>	<ul style="list-style-type: none"> <li>• <i>These relationships are particularly important in the reporting of Exploration Results.</i></li> <li>• <i>If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.</i></li> <li>• <i>If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').</i></li> </ul>	<ul style="list-style-type: none"> <li>• The mineralisation is interpreted to be steeply dipping. Drill holes have been angled to intercept the mineralisation as close to perpendicular as possible.</li> <li>• Down hole intercepts are reported. True widths are likely to be 60-70% of the down hole widths.</li> </ul>
<b>Diagrams</b>	<ul style="list-style-type: none"> <li>• <i>Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plans and sections.</i></li> </ul>	<ul style="list-style-type: none"> <li>• Refer to plans and sections within report</li> </ul>
<b>Balanced reporting</b>	<ul style="list-style-type: none"> <li>• <i>Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.</i></li> </ul>	<ul style="list-style-type: none"> <li>• The accompanying document is considered to represent a balanced report</li> </ul>
<b>Other substantive exploration data</b>	<ul style="list-style-type: none"> <li>• <i>Other exploration data, if meaningful and material, should be reported.</i></li> </ul>	<ul style="list-style-type: none"> <li>• All meaningful and material data is reported</li> </ul>
<b>Further work</b>	<ul style="list-style-type: none"> <li>• <i>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</i></li> </ul>	<ul style="list-style-type: none"> <li>• Further drilling is planned based on the results of this current program</li> </ul>